

Рекомендация перед выбором станции повышения давления

Грамотный подбор

Лист данных показывает параметры модели. Надежность подтверждается проверкой условий системы.



Что нужно проверить

Сверяются:



Расход



Напор



Входное
давление



Пики
потребления



Количество
насосов



Резерв



Гидроаккумулятор



Автоматика



Частотное
регулирование



Защита
от сухого хода

Почему это важно

Ошибки в подборе дают риски:



Просадка
давления



Шум



Гидроудар



Частые
пуски



Перегрузка



Нестабильная
работа системы

Перед закупкой отправьте параметры на проверку

После подтверждения подбора рассчитаем конфигурацию, цену, срок поставки и КП под ваш объект.



+7 (800) 777-20-97



zakaz@proteplo.org



proteplo.org



Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60197992

Customer pos. no.:

Model :

2NKV 20/10 T400/50 11 FF DRU DNA100

Pump data

MEI ≥

Pressure rating : PN 16
Min. fluid temperature : -15 °C
Max. fluid temperature : 70 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,00234 MPa

Hydraulic data (duty point)

Flow :

Head :





Motor data main pump:

Nominal power P2 : 11 kW
Rated voltage : 400 V
Rated speed : 2.930 1/min
Nominal current : 19,7 A

Dimensions in mm

A	1.261
B	839
C	790
D	820
DNA	100
DNM	2" 1/2
H	1.805
H1	880
H2	236

Curve tolerance according to ISO 9906

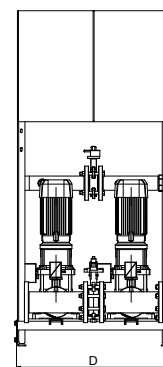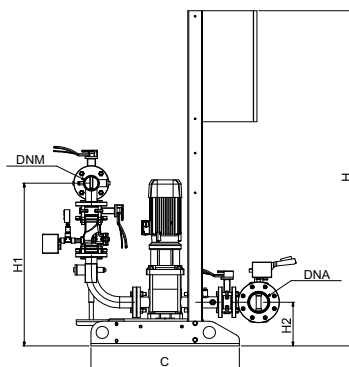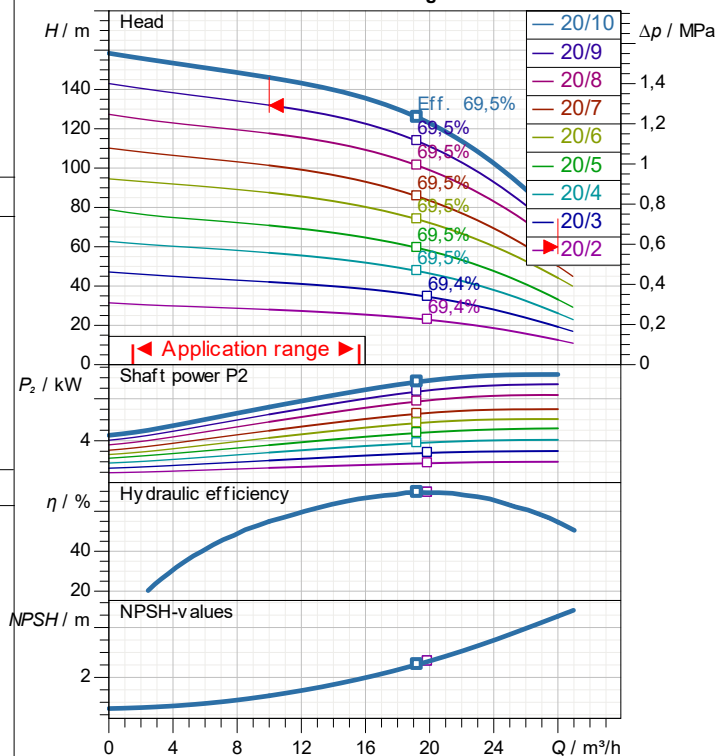


Weight : 0 kg

Pump connection

Suction side : DN 100 / PN 16
Discharge side : 2" 1/2 / PN 16

Receiver

Company
Reference
Address
Phone
Fax
E-mail

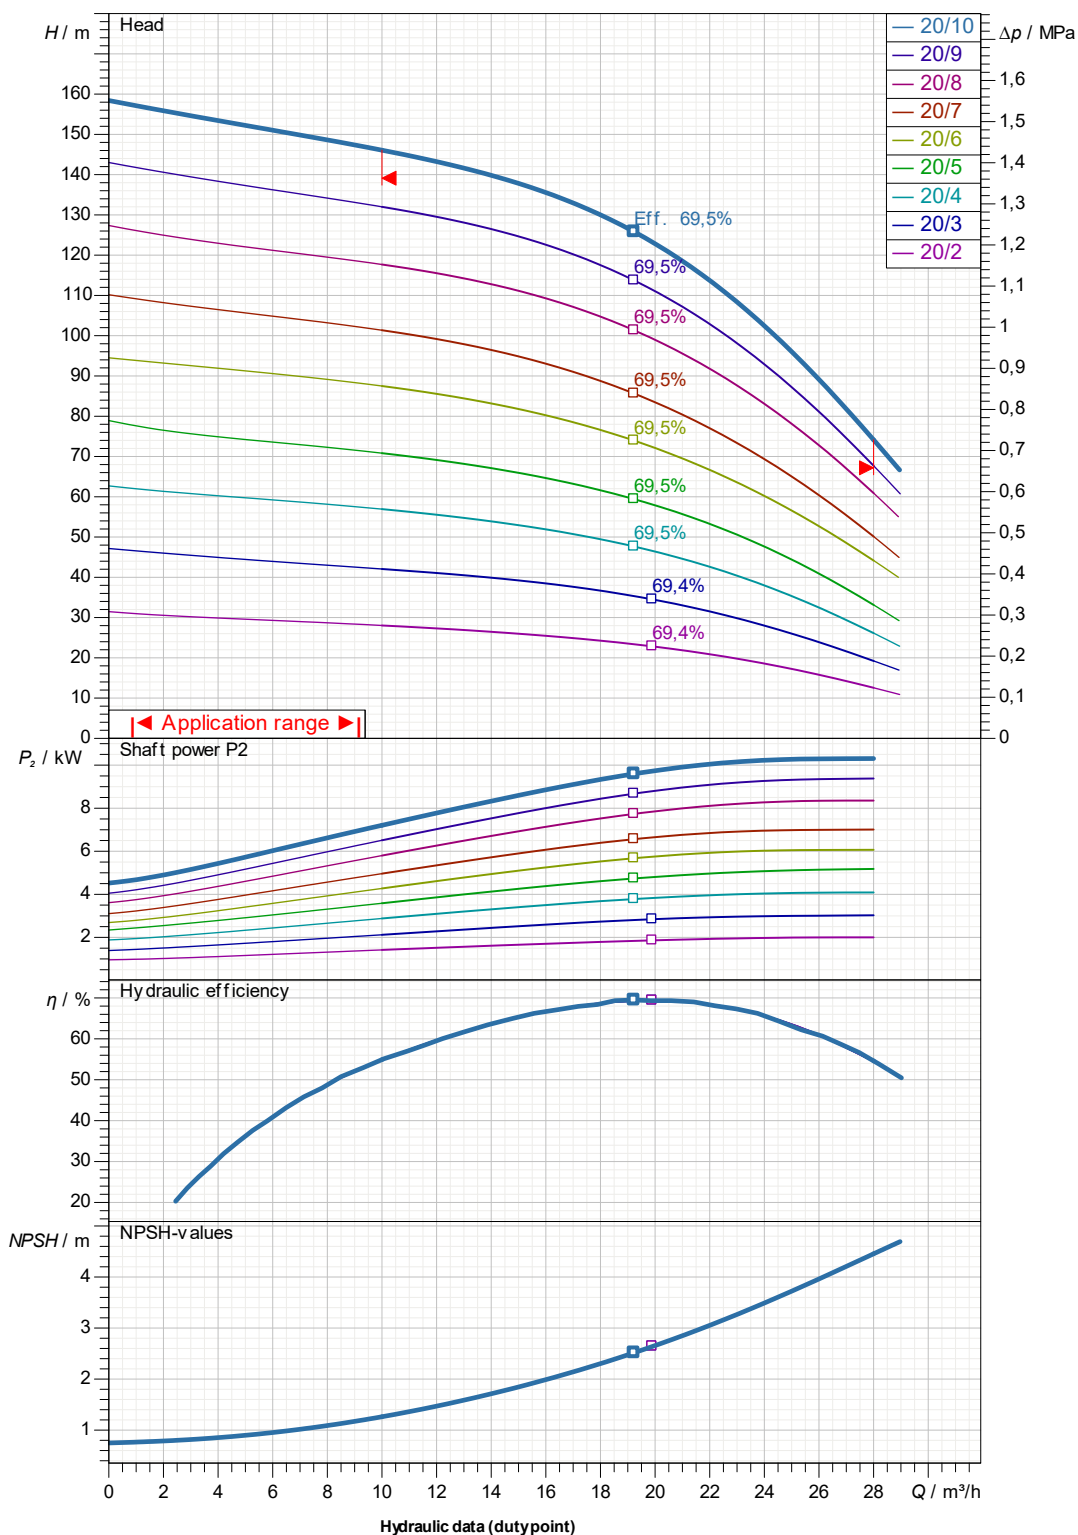2NKV 20/10 T400/50 11 FF DRU DNA100
Curve tolerance according to ISO 9906


Suction side :
DN 100
PN 16

Discharge side :
2" 1/2
PN 16

Flow :

Head :

Rated speed :
2.930 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

09/06/26

