

Рекомендация перед выбором станции повышения давления

Грамотный подбор

Лист данных показывает параметры модели. Надежность подтверждается проверкой условий системы.



Что нужно проверить

Сверяются:



Расход



Напор



Входное
давление



Пики
потребления



Количество
насосов



Резерв



Гидроаккумулятор



Автоматика



Частотное
регулирование



Защита
от сухого хода

Почему это важно

Ошибки в подборе дают риски:



Просадка
давления



Шум



Гидроудар



Частые
пуски



Перегрузка



Нестабильная
работа системы

Перед закупкой отправьте параметры на проверку

После подтверждения подбора рассчитаем конфигурацию, цену, срок поставки и КП под ваш объект.



+7 (800) 777-20-97



zakaz@proteplo.org



proteplo.org



Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

500140260

Customer pos. no.:

Model :

2 Euro 50/50 AD 1x230 50/60 IE3

Pump data

Pressure rating : 0,8 MPa
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,00 MPa

Hydraulic data (duty point)

Flow :
Head :




Motor data

Brand: DAB
Nominal power P2 : 2 x 1 kW
Rated speed : 2.800 1/min
Rated voltage : 1~ 230 V 50 Hz
Nominal current (set) : 2 x 6,3 A
Degree of protection : IP 44

Dimensions in mm

A	765		
B	540		
C	300		
D	410		
DNA	2"		
DNM	1" 1/2		
H1	185		
H3	517		

Curve tolerance according to ISO 9906

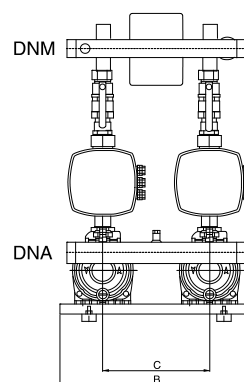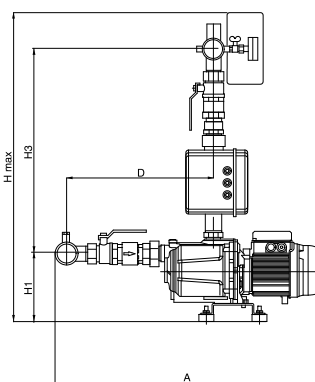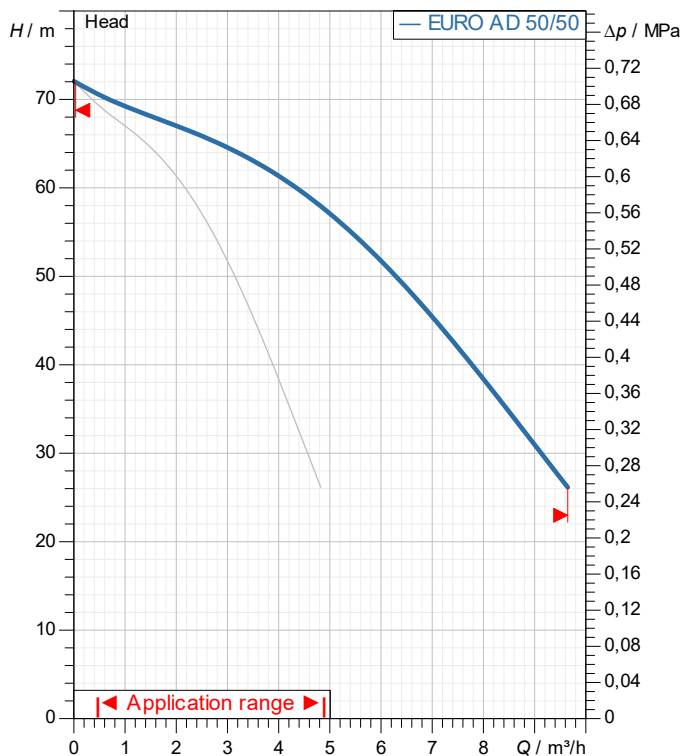

Weight : 57 kg

Pump connection


Suction side : 2" / 0,8 MPa
Discharge side : 1" 1/2 / 0,8 MPa

Receiver

Company
Reference
Address
Phone
Fax
E-mail

2 Euro 50/50 AD 1x230 50/60 IE3

Curve tolerance according to ISO 9906

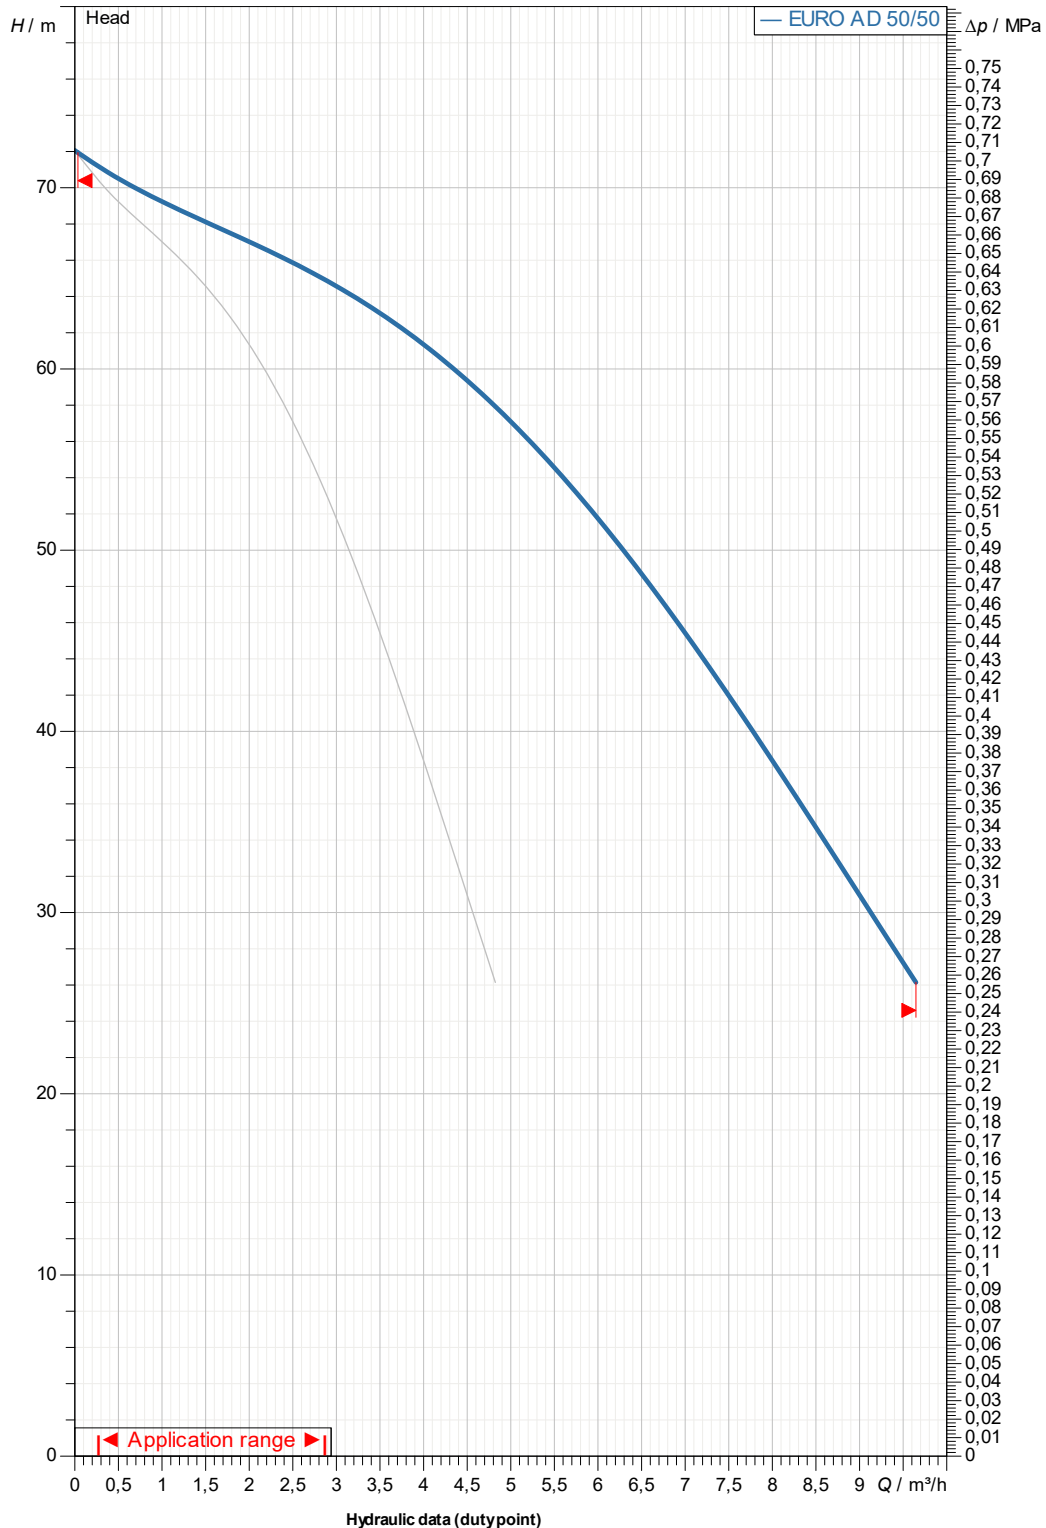

Suction side :
2"
0,8 MPa

Discharge side :
1" 1/2
0,8 MPa

Flow :

Head :

Rated speed :
2.800 1/min

Project

Project ID

Created by



Created on

09/06/26

Receiver

Company
Reference
Address
Phone
Fax
E-mail

2 Euro 50/50 AD 1x230 50/60 IE3

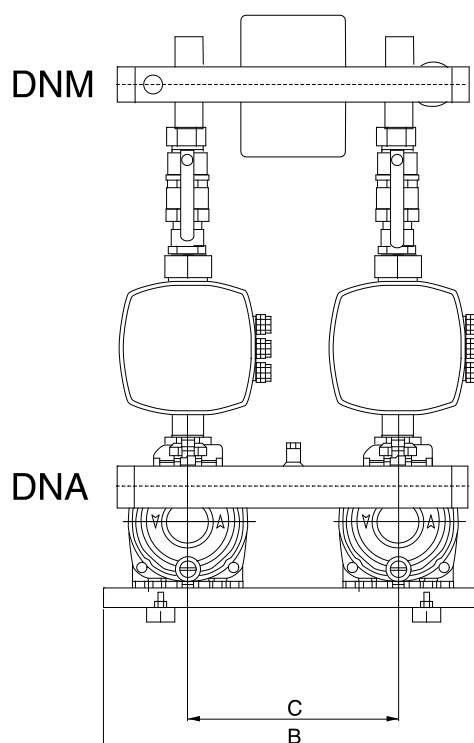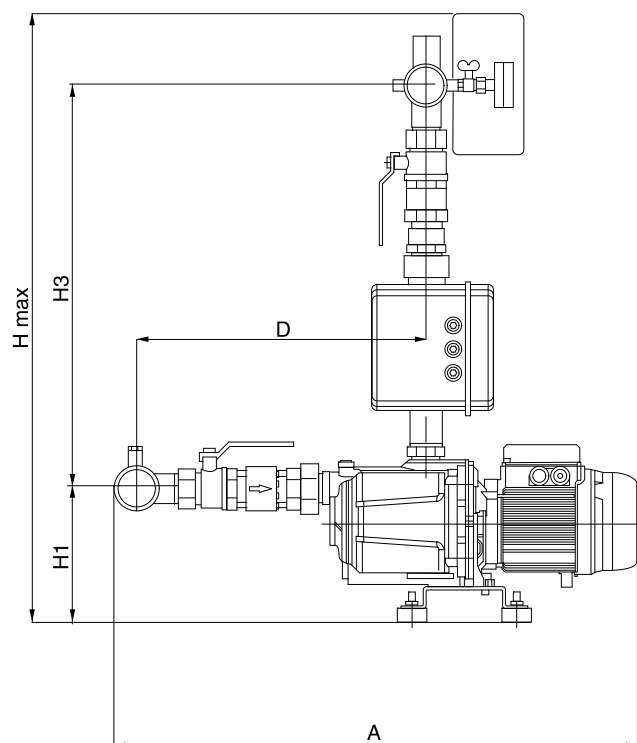

Dimensions in mm							Pump connection
1	A	765					Suction 2 " 0,8 MPa Discharge 1 " 1/2 0,8 MPa
2	B	540					
3	C	300					
4	D	410					
5	DNA	2"					
6	DNM	1" 1/2					
7	H1	185					
8	H3	517					
9							
10							
11							
Project			Project ID			Created by	Created on 09/06/26